


ORDER INFORMATION

NR08 - S - HXX - XX

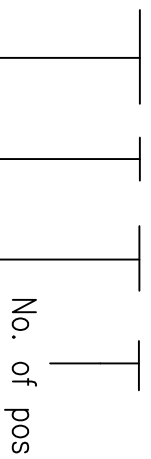

Series | Base Height

P : Plug
S : Socket

| HIGH | SOCKET(H) | PLUG(H) |
|------|-----------|---------|
| 4.0 | 3.0 | 1.0 |
| 4.5 | 3.5 | 1.0 |
| 5.0 | 4.0 | 1.0 |
| 5.5 | 4.5 | 1.0 |
| 6.0 | 4.0 | 2.0 |
| 6.5 | 4.5 | 2.0 |

| | A | B | C | D | | A | B | C | D |
|-----|------|------|------|------|------|------|------|------|------|
| 8P | 5.1 | 2.4 | 4.2 | 3.9 | 34P | 15.5 | 12.8 | 14.6 | 14.3 |
| 10P | 5.9 | 3.2 | 5.0 | 4.7 | 36P | 16.3 | 13.6 | 15.4 | 15.1 |
| 12P | 6.7 | 4.0 | 5.8 | 5.1 | 38P | 17.1 | 14.4 | 16.2 | 15.9 |
| 14P | 7.5 | 4.8 | 6.6 | 6.3 | 40P | 17.9 | 15.2 | 17.0 | 16.7 |
| 16P | 8.3 | 5.6 | 7.4 | 7.1 | 42P | 18.7 | 16.0 | 17.8 | 17.5 |
| 18P | 9.1 | 6.4 | 8.2 | 7.9 | 44P | 19.5 | 16.8 | 18.6 | 18.3 |
| 20P | 9.9 | 7.2 | 9.0 | 8.7 | 46P | 20.3 | 17.6 | 19.4 | 19.1 |
| 22P | 10.7 | 8.0 | 9.8 | 9.5 | 48P | 21.1 | 18.4 | 20.2 | 19.9 |
| 24P | 11.5 | 8.8 | 10.6 | 10.3 | 50P | 21.9 | 19.2 | 21.0 | 20.7 |
| 26P | 12.3 | 9.6 | 11.4 | 11.1 | 60P | 25.9 | 23.2 | 25.0 | 24.7 |
| 28P | 13.1 | 10.4 | 12.2 | 11.9 | 70P | 29.9 | 27.2 | 29.0 | 28.7 |
| 30P | 13.9 | 11.2 | 13.0 | 12.7 | 80P | 33.9 | 31.2 | 33.0 | 32.7 |
| 32P | 14.7 | 12.0 | 13.8 | 13.5 | 100P | 41.9 | 39.2 | 41.0 | 40.7 |

P.C.B PATTEN

| THROUGH HOLE PROJECTION | UNIT mm | SCALE 1/5 | TOLERANCE |
|-------------------------|----------|--------------------|-----------|
| APPROVAL | CHECK | DESIGN | DRAW |
| DATE 2012/6 | REVISION | SIGN | |
| SHINHWAVECH | | DRAWING NO. NR08-S | |