

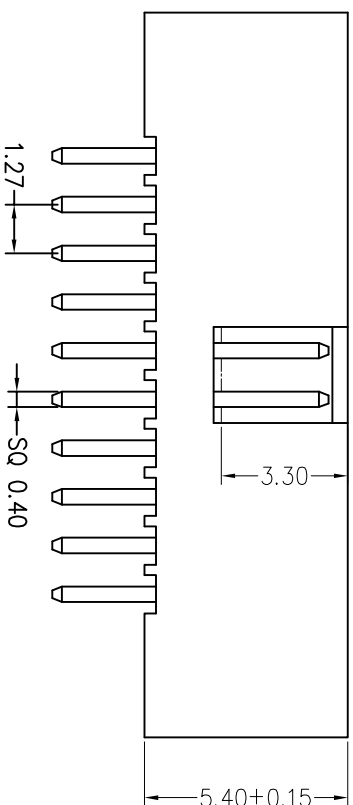
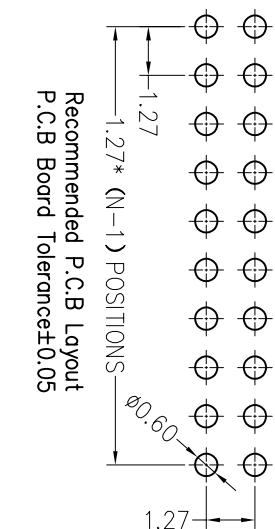


ROHS

NOTES:
 Voltage Rating: 100V,AC/DC
 Current Rating: 1.0 AMP,AC/DC
 Dielectric Withstand Voltage: 500V,AC/Minute
 Contact Resistance: 20 mΩ Max
 Insulation Resistance: 1000 mΩ Min
 Operation Temperature: -40°C to +105°C
 Insulator Material: Polyester(PA6T),UL94 V-0
 Contact Material: Brass
 Contact Plating: Au Plated on Nickel Overall

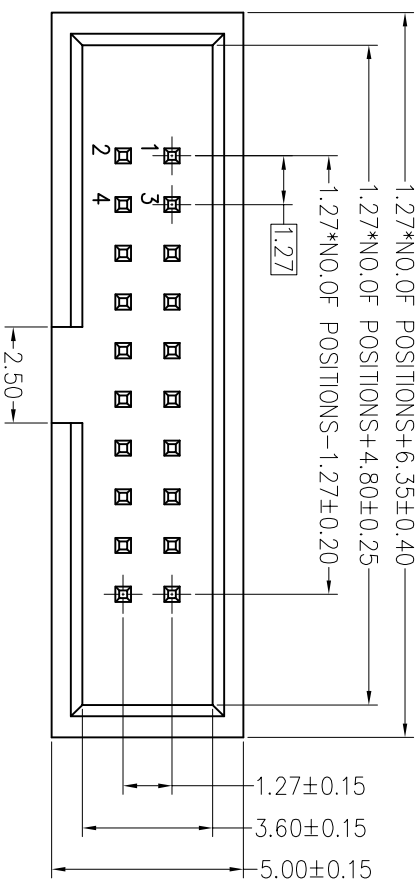

SHINHWHA TECH CO., LTD

X.X	0.30	单位 (UNIT)	MM	绘图 (DRAWN BY)	pinquon
版本 (REV)	A/0	比例 (SCALE)	FREE	核对 (CHECKED BY)	
X.XXX	0.20	日期 (DATE)	2023.05.15	核准 (APPROVE)	
X.XXX	0.10				

PART NUMBER	BHA1-XX-G1
TITLE	1.27 BOX HEADER ST H: 5.4