
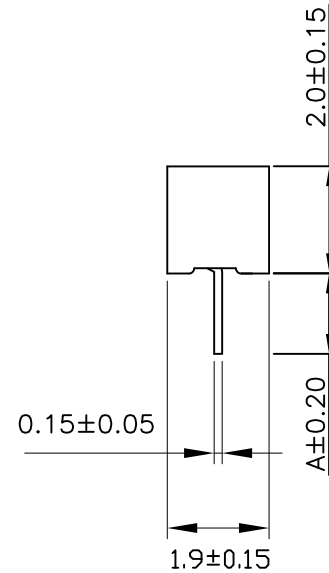
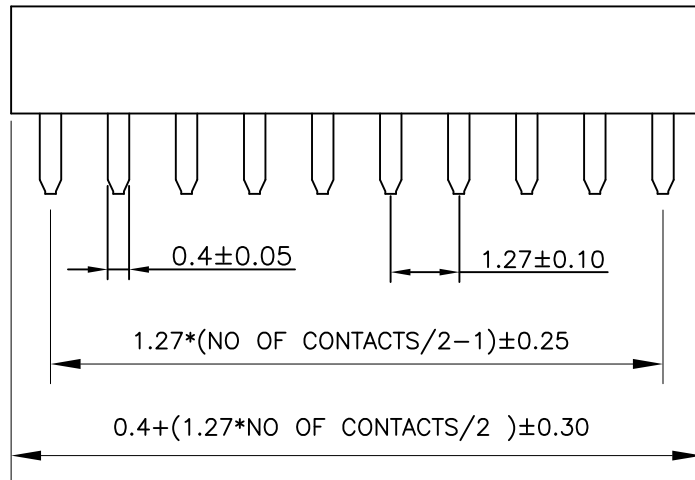



REV	ECN. NO.	APP.	DATE
B			



SPECIFICATION

- \* Current Rating: 1 A
- \* Withstanding Voltage: 300 VAC ( 1 min. )
- \* Insulation Resistance: 1000 Megohms MIN.
- \* Contact Resistance: 30 Milliohms MAX.
- \* Operating Temperature: -40°C to +105°C

ORDER INFORMATION

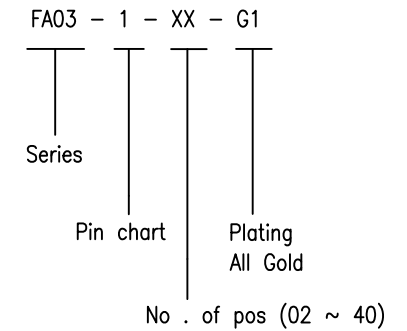


MATERIAL

- \* Contact: Phosphor Bronze
- \* Insulator: PA6T + 30% G.F.
- \* Plating: All Gold

Pin Chart

Pin	A
1	2.4

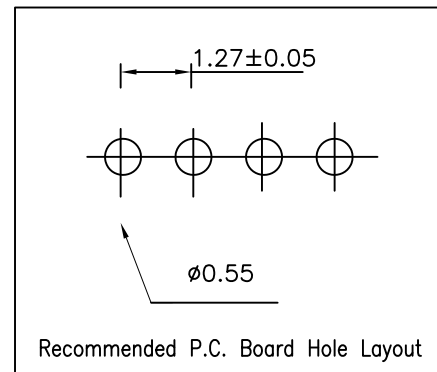

<p>(주)신화테크 SHINHWA TECH CO.,LTD TEL : 031-451-9441 FAX : 031-451-9444</p>		TITLE:	PART NO:
		1.27mm Female Header Single Row Straight (H:2.0)	APP BY:
0.0±	SCALE:	MATL: PA6T + 30% G.F.	CHK BY:
0.00±	UNIT: MM		DWG NO: FA03
0.000±			