
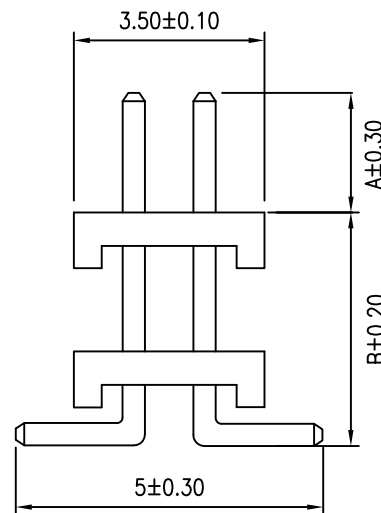



REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

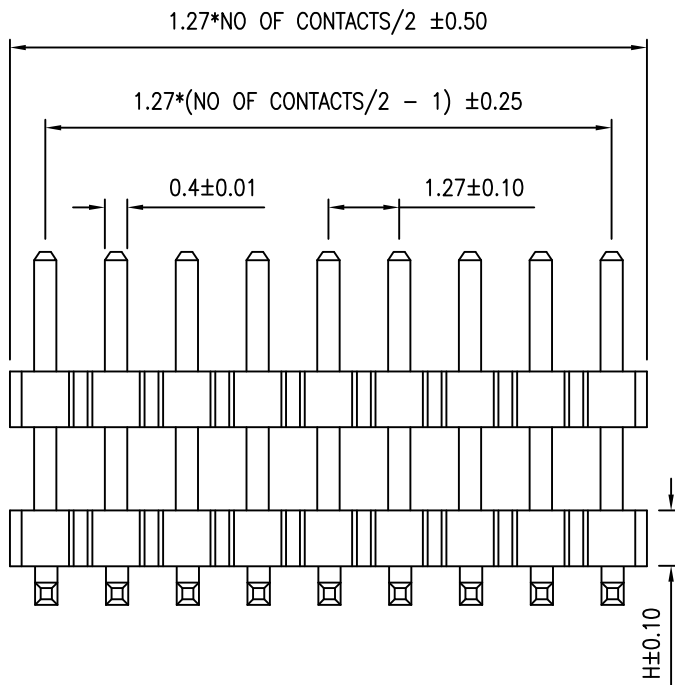

SPECIFICATION

- \* Current Rating: 1 A
- \* Withstanding Voltage: 300 VAC ( 1 min. )
- \* Insulation Resistance: 1000 Megohms MIN.
- \* Contact Resistance: 30 Milliohms MAX.
- \* Operating Temperature: -40°C to +105°C

ORDER INFORMATION

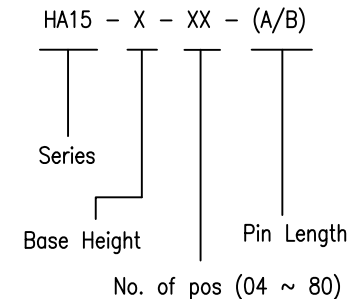

MATERIAL


- \* Contact: Brass  
0.40mm square post
- \* Insulator: PA6T + 30% G.F.
- \* Plating: All Gold

Base Height

Base	H
1	1.00
2	1.20
3	1.50
4	2.00
5	2.50
6	3.00

Pin Chart

Pin	A	B
1	2.50	5.50
2		
3		
4		
5		
6		

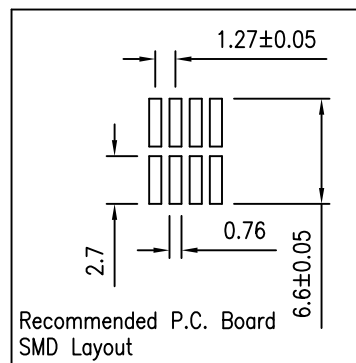

(주)신화테크

SHINHWA TECH CO.,LTD  
TEL : 031-451-9441 FAX : 031-451-9444

0.0±	SCALE:	TITLE:	PART NO:
0.00±	UNIT:	1.27MM Pin Header Dual Row	
0.000±	MM	SMD Double Base	APP BY:
		MATL: PA6T + 30% G.F.	CHK BY:
		DWG. NO. HA15	DR BY: