



**ROHS**



NOTES:  
 Voltage Rating: 100V<sub>AC</sub>/DC  
 Current Rating: 1.5 AMP<sub>AC</sub>/DC  
 Dielectric Withstand Voltage: 400V<sub>AC</sub>/Minute  
 Contact Resistance: 20 mΩ Max  
 Insulation Resistance: 800 mΩ Min  
 Operation Temperature: -40°C to +105°C  
 Insulator Material: Polyester, UL94 V-0  
 Contact Material: Brass  
 Contact Plating: Au Plated on Nickel Overall

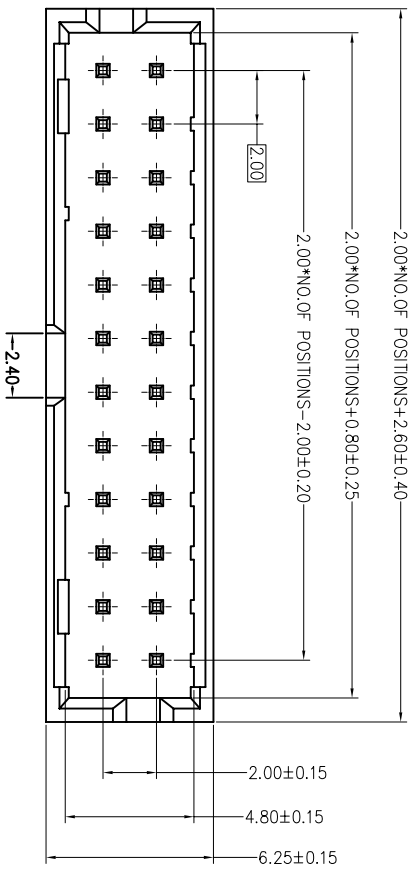

Dimension orfitesses list	
item	PA
Standard	2.50
Alternate	---

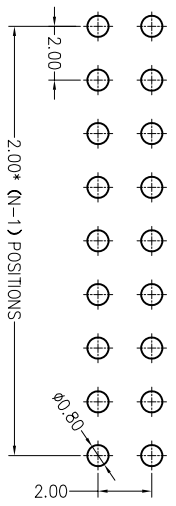

Recommended P.C.B Layout  
 P.C.B Board Tolerance  $\pm 0.05$

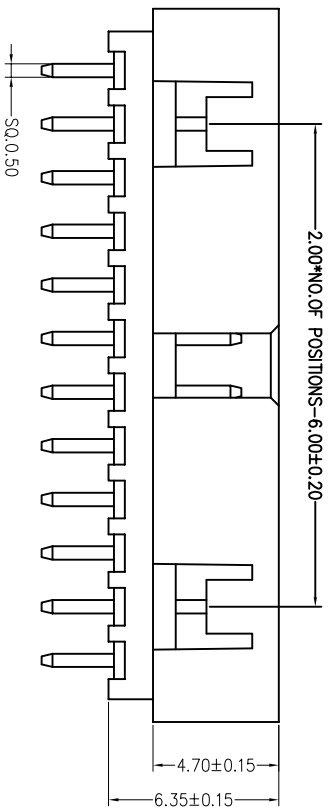

**SHINHWHA TECH CO., LTD**

PART NUMBER **BHB7-XX-G1**

TITLE **2.0 BOX HEADER ST H: 6.35**

版本 (REV)	A/0	X.XX	X.XX	X.XXX
单位 (UNIT)	MM	MM	MM	MM
比例 (SCALE)	FREE	FREE	FREE	FREE
日期 (DATE)	2022.11.10			
绘图 (DRAWN BY)	pingquan			
核对 (CHECKED BY)				
核准 (APPROVE)				

A B C D E F G

5

5

4

4

3

3

2

2

1

1