

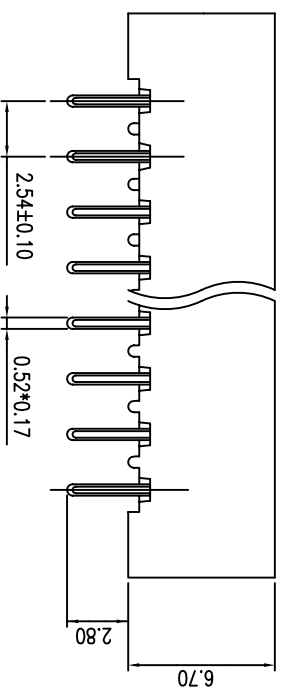



REV	ECON NO.	APP.	DATE
A	NEW DESIGN		88/05/25

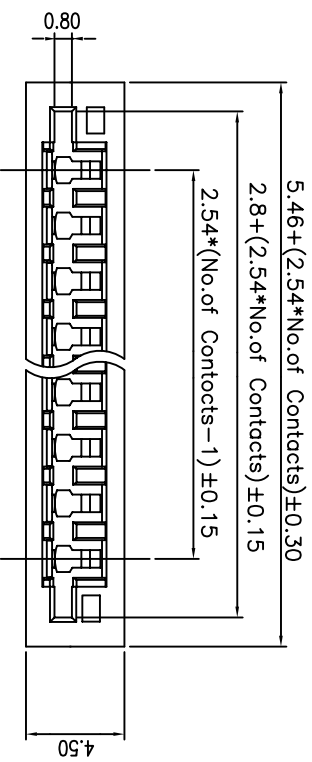

**SPECIFICATION**


- \* Current Rating: 1 A
- \* Withstanding Voltage: 800 VAC ( 1 min. )
- \* Insulation Resistance: 1000 Megohms min.
- \* Contact Resistance: 20 Milliohms max.
- \* Operating Temperature: -40°C To +85°C

**ORDER INFORMATION**

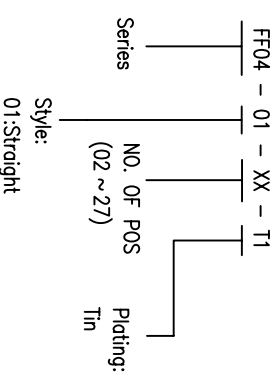

**MATERIAL**

- \* Contact: Phosphor Bronze
- \* Insulator: PBT & 30% G.F.
- \* Plating: Tin

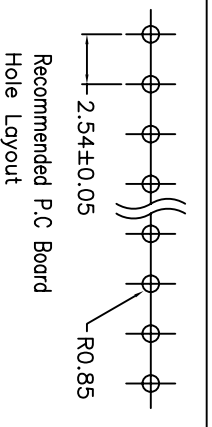

**SHINHWHA TECH CO.,LTD**

0.0±	SCALE:	TITLE:	PART NO.:
0.00±	UNIT: MM	2.54mm FPC/FPC DIP STRAIGHT	APP BY:
0.000±			CHK BY:
			DR BY:
	DWG. NO. FF04-01		