
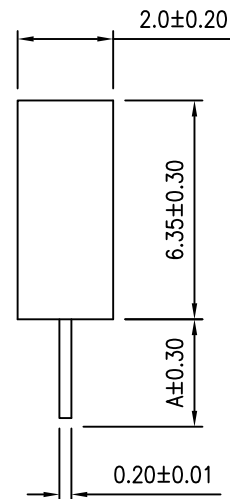
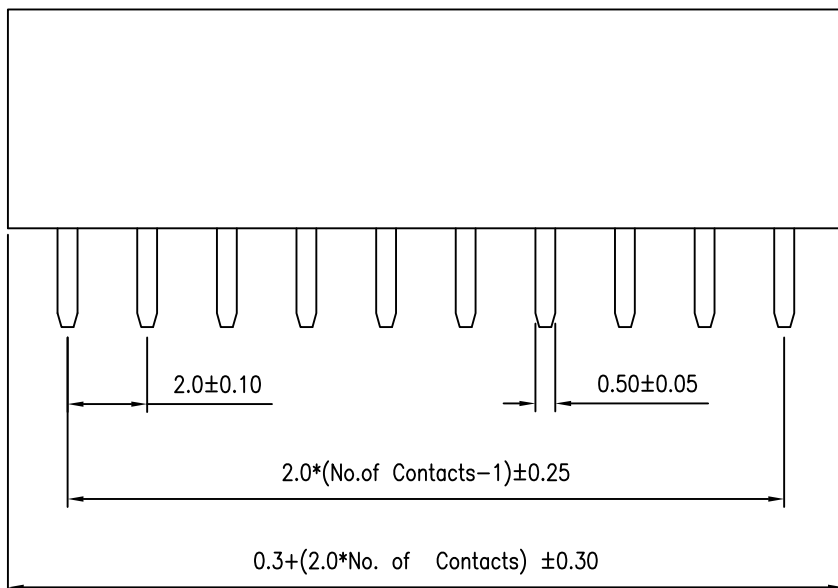



REV	ECN NO.	APP.	DATE
A	NEW DESIGN		



SPECIFICATION

- \* Current Rating: 2 A
- \* Withstanding Voltage: 500 VAC ( 1 min. )
- \* Insulation Resistance: 1000 Megohms MIN.
- \* Contact Resistance: 30 Milliohms MAX.
- \* Operating Temperature: -40°C to +105°C

ORDER INFORMATION




MATERIAL

- \* Contact: Phosphor Bronze
- \* Insulator: PA6T & 30% G.F.
- \* Plating: All Gold

Pin Chart

Pin	A
1	3.10

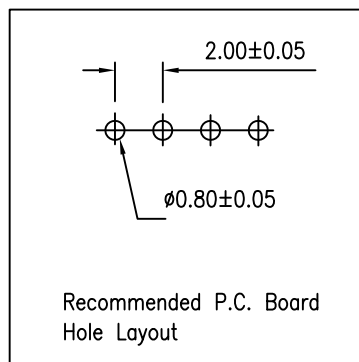

<p>(주)신화테크 SHINHWA TECH CO.,LTD</p> <p>TEL : 031-451-9441 FAX : 031-451-9444</p>		SCALE:	TITLE:	PART NO:
		UNIT: MM	2.00MM Female Header Single Row Straight (H:6.35)	APP BY:
0.0±		MATL:	PA6T + 30% G.F.	CHK BY:
0.00±		DWG. NO. FB04	DR BY:	
0.000±				