

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		



SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 1000 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C


MATERIAL

- * Contact: Brass , Selective Gold or All Gold
- * Insulator: PBT & 30% G. F.
- * Shell: Steel , Tin Plated

ORDER INFORMATION

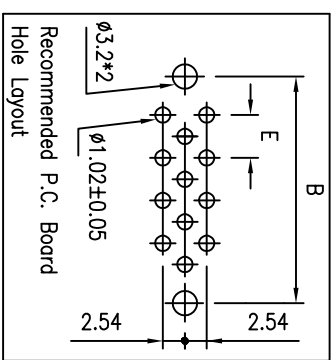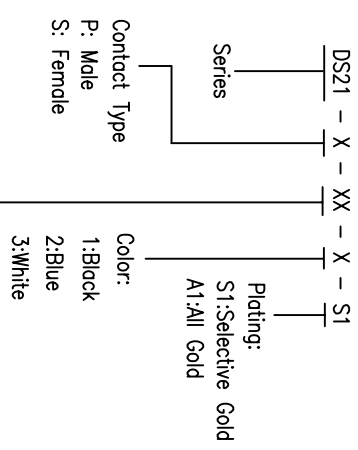

PART NO.	A	B	C	D	E
DS21-X-15-S1	16.92	24.99	30.81	16.33	2.29
DS21-X-26-S1	25.25	33.32	39.14	24.66	2.29
DS21-X-44-S1	38.96	47.04	53.04	38.38	2.29
DS21-X-62-S1	55.42	63.50	69.32	54.84	2.41

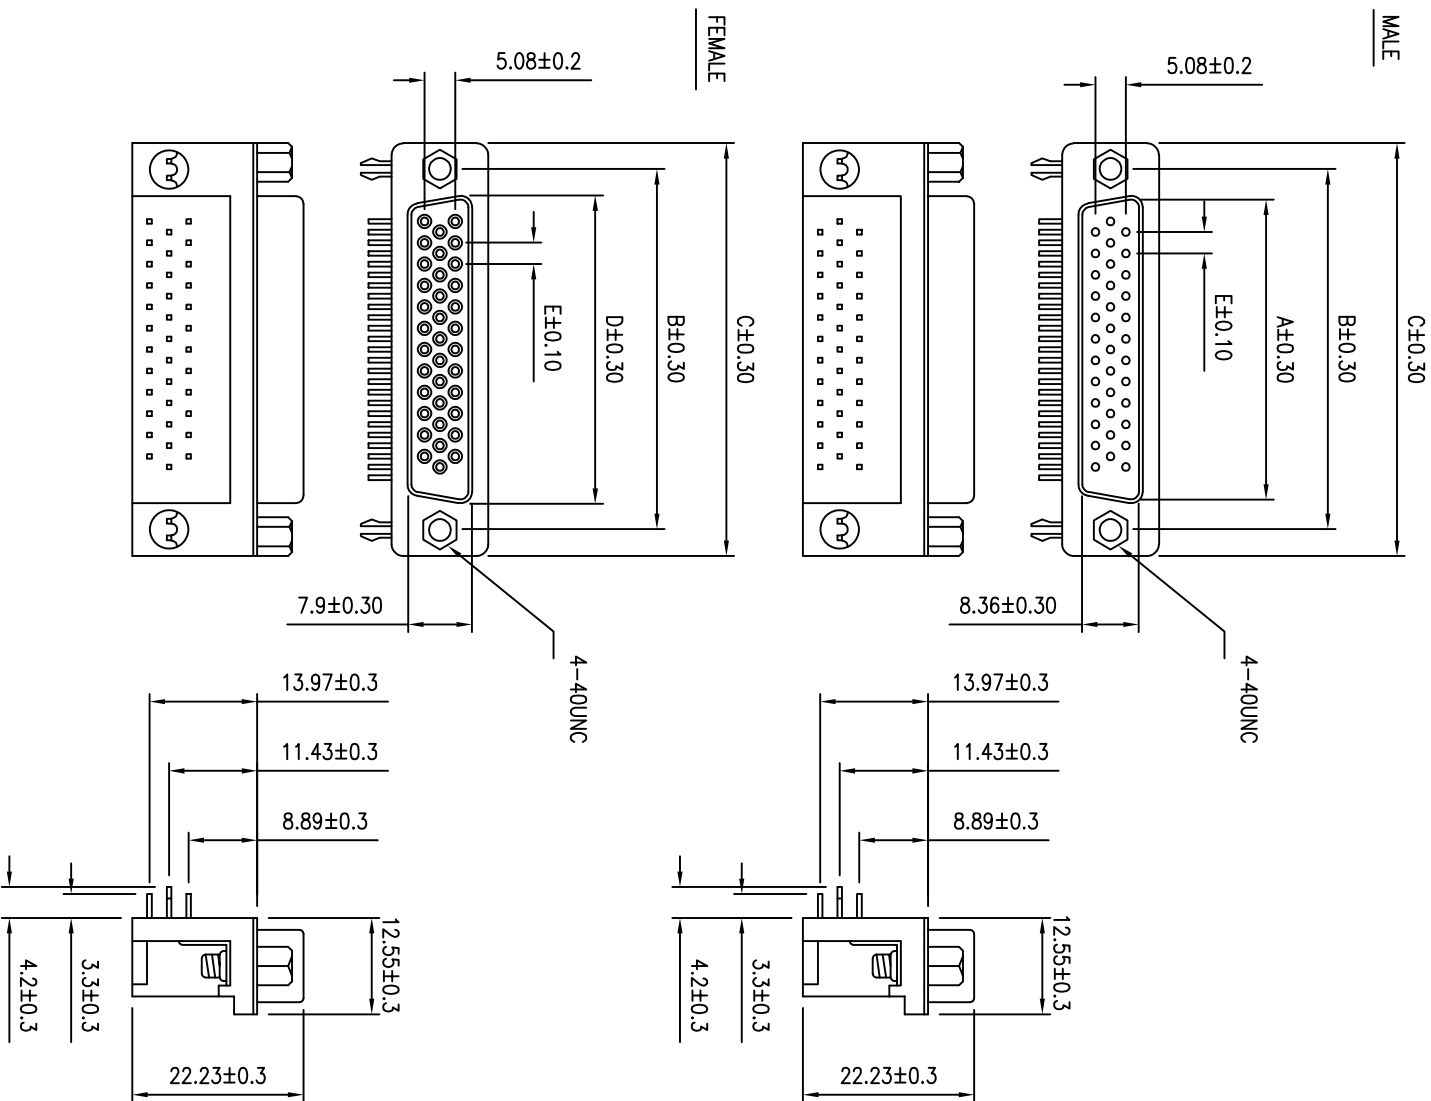

SHINHWHA TECH CO.,LTD

0.0±	SCALE:	TITLE:	PART NO.:
0.00±	UNIT: MM	D-SUB CONNECTOR H.D.	APP BY:
0.000±		Right Angle Type	CHK BY:
		MATL: PBT + 30% G.F.	DR BY:
		DWG. NO. DS21	